

# DXN 100

**Scotsman**  
Ice Systems

Ice Machine/Dispenser 66 kg

Item #:

Project:

Quantity:



## FEATURES

- Compact ice or ice & water automatic dispenser, with appealing, contemporary "touch-screen" design.
- Ideal for free-refill self-service concepts with up to 1200 glasses filled per day and capable of dispensing ice for up to 100 customers in queue at one time.
- Available either touch-free or button activated.
- Possible to set ice only or ice & water on site and desired ice dosage (from 1" to 15" or continuous).
- Fast & friendly cleaning mode for the end user.
- Algorithm signaling when reservoir is temporarily empty.
- Full frontal visibility of settings and errors for preventative service check-up.
- Accessory: on request, it can be installed upon a specifically designed cabinet.



DXN 100  
Cubelet 1 g  
W 16 x D 15 x H 7-8 mm

## CONDENSING SYSTEM

Air cooled

## REFRIGERANT GAS

R452A

## VOLTAGE V/Hz/ph

230/50/1

## INTERNAL BIN CAPACITY

5 kg

## CERTIFICATIONS



## OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	38
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Ice Machine/Dispenser 66 kg

# DXN 100


**Scotsman**  
Ice Systems

Ice Machine/Dispenser 66 kg

Item #:

Project:

Quantity:

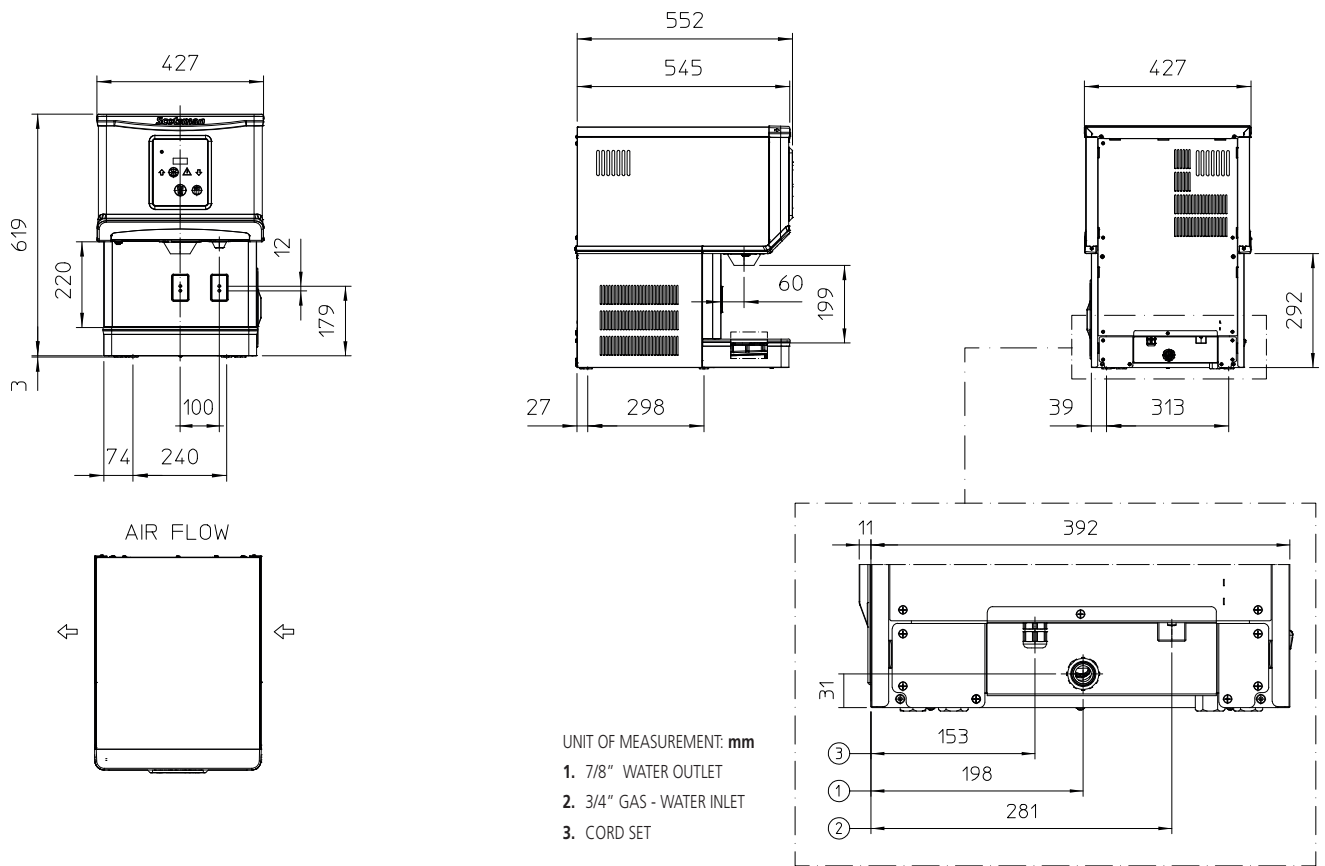

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		427 x 552 x 622 mm			Carton (W x D x H)		490 x 610 x 790 mm				
Net weight		49 kg			Weight		56 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
DXN 100 AS	230/50/1	66	61	45	21.0	9.5	1.9	410	573	3 x 1.5	10

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions